

Toggle Switches

RATINGS	CIRCUIT	TOGGLE POSITION			CATALOG NUMBER			
		UP	CENTER	DOWN (keyway)	TYPE OF TERMINATION			
					.187 Q.C.	SCREW	.250 Q.C.	SOLDER LUG

7300 SERIES TOGGLE - SINGLE POLE

20A-125VAC 10A-250VAC 1 HP, 125-250VAC	SPST	ON	NONE	OFF	7305A	7305B	7305C	7305D
		(ON)	NONE	OFF	7335A	7335B	7335C	7335D
		ON	NONE	(OFF)	7345A	7345B	7345C	7345D
	SPDT	ON	NONE	ON	7301A	7301B	7301C	7301D
		ON	OFF	ON	7302A	7302B	7302C	7302D
		(ON)	NONE	ON	7351A	7351B	7351C	7351D
		(ON)	OFF	ON	7352A	7352B	7352C	7352D
		(ON)	OFF	(ON)	7362A	7362B	7362C	7362D

9300 SERIES TOGGLE - DOUBLE POLE

20A-125VAC 10A-250VAC 1 HP, 125-250VAC	DPST	ON	NONE	OFF	9303A	9303B	9303C	9303D
	DPDT	ON	NONE	ON	9301A	9301B	9301C	9301D
		ON	OFF	ON	9302A	9302B	9302C	9302D

For .687 Toggle And .468 Bushing Length Add-100 To Part Number Specified
For Dust And Moisture Resistant Seal Add "S" To Part Number Specified
*Standard Feature On Momentary Switches

() Denotes Momentary

SPECIFICATIONS

Agency Listings



CSA Certified

Contact Mechanism

Slow-Make/Slow-Break Butt Contact

Contact Material



Stationary (Center) - Copper Alloy/Silver Plated
Stationary (End) - Silver Cadmium Oxide Composite
Movable-Silver Cadmium Oxide Composite

Dielectric Strength

1500 Volts RMS Minimum

Mounting Means

15/32" Diameter Threaded Bushing
Keyway .078-.083 Wide X .037-.043 Deep
Standard Hardware Supplied —
One Hex Nut Assembled And
One Hex Nut Unassembled.

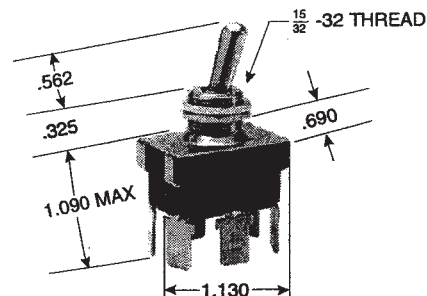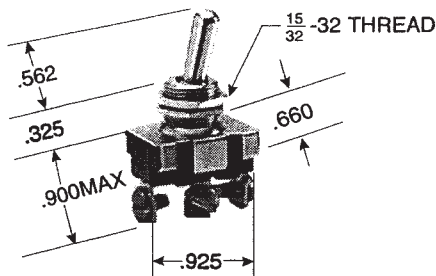

UL FILE NO. E7407
CSA FILE NO. LR8435